

Remote Annunciator

RA-2000 / RA-2000GRAY

The RA-2000, 4x40, red remote annunciator can be used to operate and program the Honeywell Farenhyt Series FACP's.

The remote annunciator connects to the control panel via the RS-485 SBUS. When the system is in normal operation and has AC power, the Power LED is lit and all other LEDs are off. The other LEDs turn on as alarms, supervisories, troubles, and system silenced occur.

The RA-2000 can be surface or flush mounted and is also available in gray color as RA-2000GRAY.

Compatibility

The RA-2000 is compatible with the following Farenhyt Series FACP's:

- IFP-2000/ECS
- IFP-2100/ECS
- IFP-75
- IFP-300/ECS
- RPS-2000
- RFP-2100
- ECS-LOC
- ECS-LOC2100



RA-2000

Agency Listings



Pending




City of
New York
Pending

FEATURES & BENEFITS

- Four line LCD display with 40 characters per line
- Tactile/audible feedback when key is pressed on annunciator
- RS-485 SBUS interface to panel
- Initiate and end fire drills with a single key press
- Can be flush or surface mounted. Trim ring (P/N RA-100TR or RA-2000GRAYTR) available for surface mounting
- Multi-panel displays can display the status and event history of all the panels they are assigned in a network
- Multi-panel annunciators will sound the highest priority tone from the panel it is assigned to
- View current status by alarms, supervisories, or troubles
- On-board piezo sounder audibly indicates alarms, troubles, and supervisories
- Five Status LEDs for; alarms, supervisory, trouble, silence and AC power indications
- Four programmable function keys
- Available in red or gray color
- Wiring lengths up to 6000 ft. from the control panel
- UL listed, complies with NFPA 72

RA-2000 Technical Specifications

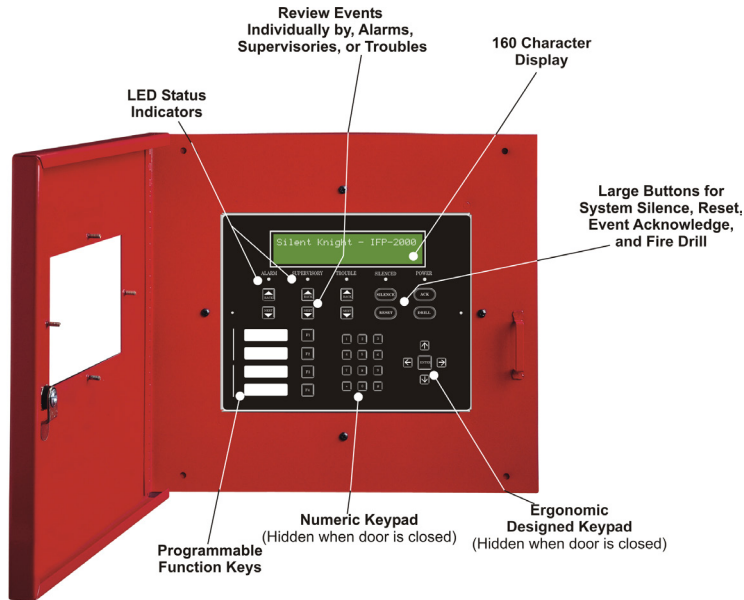

SPECIFICATIONS

Dimensions:

Flush Mount

Outside wall 12.25"W x 11.5"H x 7/8"D
(31.1W x 29.2H x 2.2D cm)

Inside wall 9-3/8"W x 8-3/8"H x 2"D
(23.8W x 21.3H x 5.1D cm)

Surface Mount

Including Trim Ring 12.25"W x 11.5"H x 3"D
(31.1W x 29.2H x 2.2D cm)

Environmental Operating Temperature: 32°F to 120°F
(0°C to 49°C)

Humidity: 0 to 93% relative humidity (non-condensing)

ELECTRICAL:

Operating Voltage: 24 VDC

Standby Current: 25 mA

Alarm Current: 50 mA

ORDERING INFORMATION

RA-2000

RED REMOTE ANNUNCIATOR

RA-2000GRAY

GRAY REMOTE ANNUNCIATOR

OPTIONAL ACCESSORIES

RA-100TR

RED SURFACE MOUNT TRIM RING

RA-2000GRAYTR

GRAY SURFACE MOUNT TRIM

RINGECS

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

For a complete listing of all supported bar code symbologies, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

All other trademarks are the property of their respective owners.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

For more information

www.farenhyt.com

Honeywell

12 Clintonville Road

Northford, CT 06472

800-328-0103

www.farenhyt.com

Doc 350401 | Rev G | 04/17
© 2017 Honeywell International Inc.

Honeywell